


ER-T12A

Rugged Tablet PC - 20230419V1

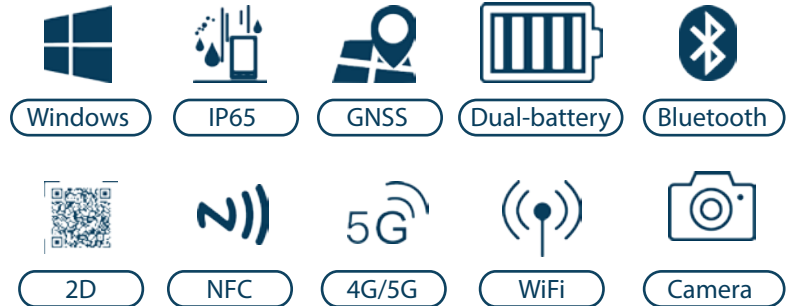

Performance

- ◆ Intel Core i5-1235U/i7-1255U processor
- ◆ Windows 11 OS and 8GB RAM + 128GB storage
- ◆ 12.2 inch IPS Full HD screen with 10-point capacitive touch

Features

- ◆ Choose 1 from 4 modules (2D scan engine, RJ45 Gigabit Ethernet, DB9 and USB2.0)
- ◆ Support GPS, GLONASS, optional Beidou
- ◆ Equipped with multiple accessories, like docking charger, hand-strap, vehicle mount, car charge, carry handle

Communication

- ◆ 2.4G/5.8G Dual band WIFI 6
- ◆ Optional high speed 5G
- ◆ BT 5.1 fast transmission

Reliability

- ◆ IP65 Waterproof and Dustproof, Anti-Static
- ◆ Vibration & 1.22m drop resistant
- ◆ MIL-STD-810G certified

Product Six View



Power Specification Parameter

Basic Parameters

Dimension	339.3 x 230.3 x 26mm
Weight	Device unit 1500g
Device Color	Black
LCD	12.2 inch IPS 16:10, 1920x1200, 650nits/280nits
Touch Panel	10 point G+G capacitive touch screen
Camera	Front 2.0MP Rear 8.0MP
I/O	USB 3.0 Type-A x 1, USB Type-C x 1, SIM Card x 1, TF Card x 1, HDMI 1.4a x 1, 12pins Pogo Pin x 1, Ø3.5mm standard earphone jack x 1, Ø5.5mm DC jack x 1
Power	AC100V ~ 240V, 50Hz/60Hz, Output DC 19V/3.42A
NFC	Optional, 13.56MHz, Card reading distance: 4cm
Fingerprint	Standard
RTV Battery	3V 210mAH

Battery

Capacity	7.4V/700mAh
Types	Built-in Li-polymer battery

Battery

Capacity	7.4V/6300mAh
Types	Removable Li-polymer battery
Endurance	4.5hrs (50% volume sounds, 200 lumens brightness, 1080P HD video display by default)

Performance Parameter

CPU	Intel Core i5-1235U/i7-1255U
OS	Windows 11, Optional Windows 10
RAM	8GB, Optional 16GB, Up to 64GB
Storage	128GB, Optional 128GB, Up to 512GB

Network Connections

WIFI	WiFi 6 802.11a,b,d,e,g,h,i,k,n,r,u,v,w,ac,ax (2.4G/5.8G)
Bluetooth	BT5.1 Transmission distance: 10m
4G/5G (Optional)	5G SA&NSA: LTE FDD: B1/B3/B5/B7/B8/B20 LTE-TDD: B40 WCDMA: B1/B5/B8 GSM: B3/B8 N1/N3/N5/N7/N8/N20/N28/N38/N40/ N41/N71/N77/N78/N79
GNSS	Support GPS, Glonass, optional Beidou

Reliability

Operate Temperature	-20 °C ~ 60 °C
Store Temperature	-30 °C ~ 70 °C
Humidity	95% Non-Condensing
Rugged Feature	IP65 certified, MIL-STD-810G certified
Drop Height	1.22m drop
Electrostatic Discharge	± 8kV contact discharge, ± 15kV air discharge

Extension Modules (1 Out Of 4)

Ethernet Interface	RJ45 (10/100/1000M) x 1
Serial Port	DB9 (RS232) x 1
USB2.0	USB 2.0 x 1
2D	Optional, Optical resolution: 5mil/ scan speed: 50 times/s

NOTE:

1. All the design and drawing are for reference only, ESPA reserved rights to make changes without prior notice.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O/ modified specs, please contact ESPA Sales Team for details.
3. Please contact ESPA Sales team for further product information and ordering.



ESPA
INDIA TECH

Contact Us



No.60, First Floor Silver Clouds Layout Horamavu
Kalkare Road Opposite to Sunshine School Bangalore – 560 043



+91 9975 263 296

www.espaindiatech.com info@espaindiatech.com



Registered Office

> Pune



Branches

> Bangalore

> Mumbai

> Hyderabad

> Delhi